



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification⁶ :

E03F 5/04, 5/06

A1

(11) International Publication Number:

WO 99/39057

(43) International Publication Date:

5 August 1999 (05.08.99)

(21) International Application Number: PCT/AU99/00058

(22) International Filing Date: 28 January 1999 (28.01.99)

(30) Priority Data:

PP 1507

28 January 1998 (28.01.98)

AU

(71)(72) Applicant and Inventor: REED, Selwyn [AU/AU]; P.O. Box 489, Mona Vale, NSW 1660 (AU).


(74) Agent: WALSH, John, Richard; Walsh & Associates, Patent and Trade Mark Attorneys, P.O. Box 4306, Penrith Plaza, NSW 2750 (AU).

(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published

With international search report.

(54) Title: WASTE ASSEMBLY ALLOWING ADJUSTABLE FITMENT OF A FLOOR WASTE OR APPLIANCE

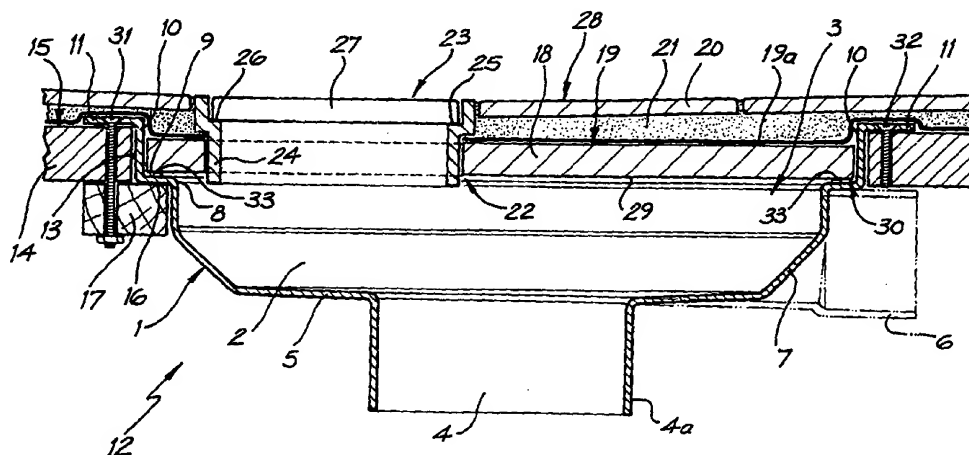

(57) Abstract

A floor or ground surface waste assembly for receiving floor or appliance generated waste including a waste body (1) defining a waste collecting receptacle (2). The waste body (1) includes an open mouth (3) for receiving waste products from a floor grate or appliance, an outlet connected to said reservoir in communication with said mouth for connecting the waste assembly to a waste drainage line for eventual discharge of said waste, said waste body (1) also including a bearing surface (9) extending at least partially about the periphery of said waste body (1) and which is capable of supporting directly or indirectly a grate or appliance outlet; wherein said mouth (3) is proportioned to allow selective positioning of a grate or appliance outlet within said mouth within the limits of the periphery of the waste body such that said selective positioning of said grate or appliance outlet obviates the necessity for said appliance outlet or grate to align axially with or be directly connected to underfloor drainage plumbing.